

07/20/99

+

A

UTILITY
PATENT APPLICATION
TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 36J.P227

First Named Inventor or Application Identifier

MOI-467

Express Mail Label No. EI568460539US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 48*
* +6a and 6b3. ☒ Drawing(s) (35 USC 113) Total Sheets 124. ☐ Oath or Declaration Total Pages

- a. ☐ Newly executed (original or copy)
- b. ☐ Unexecuted for information purposes
- c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein. **EI 568 460 539 US**

Express Mail mailing label number

Date of Deposit JULY 20, 1999

I hereby certify that this paper or fee is being deposited with
the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above
and is addressed to the Commissioner of Patents and Trademarks,
Washington, D. C. 20231.

SHARON N. FENNESSY
(Type or printed name of person mailing paper or fee)
Sharon N. Fennessy
(Signature of person mailing paper or fee)

6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	48 - 20 =	28	X \$ 18.00 =	\$ 504.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	3 - 3 =	0	X \$ 78.00 =	\$ 0.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
Total of above Calculations = \$1,524.00					
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,524.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 1,524.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Michael K. O'Neill, Reg. No. 32,622
SIGNATURE	
DATE	July 20, 1999

"Express Mail" mailing label number EI 568460539 US
Date of Deposit JULY 20, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D. C. 20231.

SHARON N. FENNESSY
(Typed or printed name of person mailing paper or fee)
Sharon N. Fennessy
(Signature of person mailing paper or fee)

SECURE PRINTING OVER CABLE NETWORK TO HOME PRINTER

BACKGROUND OF THE INVENTION

5 Field Of The Invention

The present invention relates to the secure transmission of print data generated from an internet application over a cable network to one or more set top boxes for printing on printers attached to the set top boxes. More specifically, the present invention provides a mechanism for an internet client application to generate print data and to initiate transmission of the print data over a cable network to the set top box of a subscriber in a secure manner for subsequent printing on the printer attached to the set top box.

15 Description Of The Related Art

Generally, the increasing use of the internet has resulted in the proliferation of web sites which provide various services for access by the home consumer. For example, many financial

institutions, such as banks, provide the ability for a consumer to access a web page over the internet and to view financial information related to that specific consumer. It can be appreciated that such financial information is confidential and, therefore, access to such financial information is usually protected by some type of security mechanism at the internet client application maintained by the bank. For example, a consumer may be required to enter identification data, which may include a password in order to access the consumer's financial information. In addition, the internet client application maintained by the financial institution may implement a secure communication protocol for the transmission of confidential information to the requesting consumer. The financial institution example discussed above is merely one of many internet applications that a home consumer may access to obtain information related to that specific consumer. Other such internet applications include credit card services, utility billing, and other billing statements, and merchants which sell goods and services over the internet.

Typically, a home consumer can access these internet applications through the use of a home personal computer (PC) which is connected to the internet via a gateway such as an ISP (internet service provider). In many instances, an internet client application which is maintained by a financial institution, credit card service or merchant only allows the consumer to access confidential information related to that specific consumer, and may allow such information to be downloaded from the internet client application to the consumer's home PC. Once downloaded, the confidential information can be used by the consumer for printing on a printer attached to the consumer's

home PC, for viewing by the consumer on the consumer's home PC, or for use with a PC-based application, such as a financial management application.

5 In addition to the widespread use of home PCs to access the internet, there has been a growing use of devices known as set top boxes for connecting a common television to a digital cable network. Typically, the digital cable network comprises a
10 digital broadband network which incorporates digital and analog services such as analog and digital television signal broadcasts, analog and digital pay-per-view services, digital near video on demand, and one and two way real time data communication.
15 Such digital cable networks also provide services such as web browsing and e-mail by providing access to the internet through a proxy between the internet and the digital cable network.

 The typical digital cable network has a
20 cable head end which collects value added services for distribution over the digital cable network, including television stations, pay-per-view television stations, near video on demand, web browsing and e-mail. The cable head end also
25 implements network control systems which are required to manage the distribution and control of the aforementioned services over the digital cable network. The cable head end of a typical digital cable network has the capacity to provide services
30 for as many as one-half to one million homes. Through the use of numerous hubs, each of which provides service to approximately 500 to 2,000 homes. The set top box within each home communicates with the cable head end through a
35 client/server relationship. The STB (set top box) hosts various applications that present the user with the functionality offered by the various cable

services. The more familiar applications provided over such digital cable networks are a navigator, an interactive program guide, e-mail, and a web browser. In such applications, the STB hosts the client software and the cable head end hosts the server software. The set top box itself may be one of many currently available set top boxes, such as the Explorer 2000 by Scientific Atlanta, the DCT 5000+ by General Instrument, and the Streammaster by Motorola.

Thus, home consumers with set top boxes may access various internet services, such as financial institutions, credit card services and on-line merchants via the internet proxy provided by the cable head end of the digital cable network. The home consumer can browse the various web sites provided by such internet services and through the use of the consumer's television via the consumer's set top box. Although a consumer can access the consumer's banking institution through its internet service in this manner, the consumer that is using a set top box cannot print information from such internet services because set top boxes do not currently support printers.

In many instances, it would be preferable for an internet client application that is maintained by a bank, credit card service or on-line merchant to have the capability to provide consumer-related data to a consumer on a regular basis, such as a banking statement or utility bill, by initiating transmission of such consumer-related data over the digital cable network to the consumer's set top box. For example, it would be desirable to replace monthly banking statements which are sent by mail with monthly transmissions of such banking statements to the consumer's set top box in the consumer's home. It can be further

appreciated that such regularly sent consumer-related data would preferably be automatically printed on a printer attached to the set top box so that the consumer does not need to be involved in the printing process. Due to the confidential nature of such consumer-oriented information, such printing which is initiated by the internet service would need to be handled in a secure manner such that no other subscriber to the digital cable network could access or intercept such information and to ensure that the information is delivered to the appropriate set top box. Currently, however, digital cable networks do not provide the capability to allow an internet application to initiate the secure transmission of confidential print data over the digital cable network to a set top box for printing on a printer which is locally attached to the set top box.

SUMMARY OF THE INVENTION

The present invention addresses the foregoing problems by providing an arrangement whereby an internet client application generates confidential information corresponding to a home subscriber connected to a digital cable network through a set top box, after which the internet client application establishes a secure communication path between the internet client application and the set top box corresponding to the home subscriber, whereupon the client application transmits the confidential print data over the secure communication path to the set top box for automatic printing directly by a printer that is locally attached to the set top box.

According to a first embodiment of the application, an internet client application, such as

one maintained by a bank or other financial institution, generates confidential print data, such as that contained in a banking statement. The client application then determines whether a secure communication path exists between the client application and a set top box to which the print data is directed. Upon determining that a secure communication path exists, the internet client application transmits the confidential print data to the set top box. The print data is then sent to a printer attached to the set top box for printing.

In a preferred embodiment, the client application generates confidential print data corresponding to a consumer having a set top box with a locally attached printer in the consumer's home. The client application then determines whether it has a secure connection with the cable head end of the digital cable network. If there is a secure connection, the client application sends the print data to the cable head end which renders the print data to a rasterized format that corresponds to the printer attached to the set top box that will receive the print data. The cable head end then determines whether it has a secure connection with the set top box and, if it does, the cable head end sends the rasterized print data to the set top box for printing on the locally attached printer.

By virtue of this arrangement, an internet client application, such as one maintained by a banking institution, can generate and then initiate the transmission of print data containing confidential information relating to a particular subscriber having a set top box on a digital cable network, whereby the transmission of the confidential print data is done in a secure manner through a trusted environment. Therefore, a banking

institution having an internet client application
can generate monthly banking statements for its
customers that have set top boxes in their homes,
whereby the banking statements are generated on a
5 regular schedule and then sent from the bank's
internet client application through the cable head
end of a digital cable network to the appropriate
subscriber's set top box for automatic printing on a
locally attached printer. In this manner, the home
10 user of the set top box is not required to initiate
printing of the bank statement and does not even
need to be present when printing occurs.

In another embodiment of the invention, an
internet client application, such as one maintained
15 by a banking institution, generates confidential
print data corresponding to a consumer having a set
top box with a locally attached printer in the
customer's home. in this embodiment, the cable head
end of the digital cable network is not considered a
20 trusted environment by the client application.
Therefore, the internet client application
transforms the confidential print data into
rasterized print data corresponding to the printer
attached to the set top box to which the data is
25 being sent. The internet client application then
sends the rasterized print data to the cable head
end of the digital cable network for subsequent
transmittal to the set top box in the home of the
consumer. The set top box then sends the rasterized
30 print data to the locally attached printer for
printing.

In a preferred embodiment, the client
application generates confidential print data
corresponding to a consumer having a set top box
35 with a locally attached printer in the consumer's
home. The client application then rasterizes the
print data in a format which corresponds to the

printer. Preferably, the client application also encrypts the print data for additional security. The client application then sends the rasterized, encrypted print data to the cable head end which
5 passes the print data on to the set top box. The set top box then decrypts the print data and sends it to the locally attached printer for printing.

By virtue of this arrangement, an internet client application, such as a bank, can transmit
10 confidential print data to a consumer through an untrusted environment (cable head end) by sending the print data through the cable head end of the digital cable network in a rasterized format corresponding to the particular printer that is
15 locally attached to the consumer's set top box. Therefore, the print data can be transmitted in a secure manner for printing by an internet client application even though the cable head end of the digital network is not considered a trusted
20 environment.

This brief summary has been provided so that the nature of the invention may be understood quickly. A more complete understanding of the invention can be obtained by reference to the
25 following detailed description of the preferred embodiment thereof in connection with the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a representation of a cable broadband network embodying the present invention.

5 Figure 2 is a representation of a printing architecture.

Figure 3 illustrates representative software architecture of a set top box.

10 Figure 4 shows the overall data flow of a print job from a client module through to its final delivery to a printer.

Figure 5 is a flow chart for describing the overall data flow of a print job from a client module through to its final delivery to a printer.

15 Figures 6A, 6B and 6C illustrate general arrangements for unicast (point-to-point) printing and multicast (one-to-many) printing.

20 Figures 7A and 7B are flow charts showing respective processing by the cable head end and by the set top box in response to a print job.

Figure 8 illustrates the relationship of the confirmation client created in the set top box and the confirmation server created in the cable head end.

25 Figure 9 is a block diagram illustrating secure printing of print data.

Figure 10 is a block diagram showing protocol layers which are utilized during secure push-printing.

30 Figure 11 is a block diagram illustrating an alternate method of secure printing of print data.

Figure 12 is a flow chart for describing secure printing.

35 Figure 13 is a flow chart for describing the remote plug-and-play feature.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 illustrates a regional broadband digital cable network connected to the internet and utilizing the present invention. The network is capable of delivering analog and digital broadcasts, secure analog and digital broadcasts, analog and digital pay-per-view, analog and digital impulse pay-per-view, digital near video on demand, one-way real-time datagram (broadcast IP data packets), and two-way real-time datagram (addressed IP data packets).

As shown in Figure 1, the above-listed services may be delivered from service infrastructure 1 located at the cable head-end, the infrastructure including value-added service provider systems 2 and network control systems 3. Value-added service provider systems 2 include digital satellite distribution systems, applications executing on cable servers (such as special-purpose applications like subscriber service application, content gather applications, etc.), digital media servers outputting MPEG-2 datastreams, and an application data carousel defined by the DSM-CC specification. Network control systems 2, consisting of the Broadcast Control Suite and the PowerKey Control Suite, provide management and control for the services supported by the broadband network.

Alternatively, services may be delivered from World Wide Web (WWW) 4 through internet proxy 5, for example, from remote merchants like merchant 8. Examples of merchants include banking, retailing, utilities, and the like.

In either case, the services are delivered to Cable Head End (CHE) 6, which serves as an

interface between the service providers and the rest of the broadband network.

In particular, CHE 6, which is responsible for providing services to 500,000 to 1,000,000 homes, is connected via fiber optic cabling to hubs 7, which are connected to CHE 6 or other hubs 7. Each hub 7 is, in turn, connected to at least one node 9, also using fiber optic cabling. Coaxial cable is then used to connect each node to Set Top Boxes 10 (STB's) of 500 to 2000 homes. Finally, each STB 10 is connected to television 11, printer 12 or both. Accordingly, services are delivered from a service provider to CHE 6, to one or more hubs 7, to node 9, to STB 10 and to television 11 or printer 12.

It should be noted that, by virtue of the foregoing arrangement, service infrastructure 1 may be distributed among CHE 6, hubs 7, or other facilities.

[SOFTWARE ARCHITECTURE]

Figure 2 illustrates several relevant components of service infrastructure 1, CHE 6, and STB 10, as well as relevant internet components of remote client modules connected to CHE 6 via internet proxy 5. In particular, three representative client modules 14 are illustrated (although many more are contemplated in an actual implementation), each client module 14 being located remotely of CHE 6 and connected to CHE 6 over the internet via internet proxy 5. Client modules 14 may be executing on servers operated by a bank, a newspaper, or other entity from which a user may desire print data. Of course, more than three client modules 14 may be connected to the architecture shown in Figure 2.

Each client module 14 includes client application 15, a Cable Printing Services Infrastructure (CPSI) client 16, and Internet Printing Protocol (IPP) client 17. Each client application 15 is preferably specific to services being performed at the client module, such as banking services, newspaper services, and the like. Other client-specific applications may also be executed at the client modules, such as applications that generate data or access databases for printout. Client application 15 communicates with CPSI client 16 using an application programming interface (API).

CPSI client 16 delivers print data received from client application 15 to CHE 6 through IPP client 17. Correspondingly, CHE 6 is provided with IPP server 19 to receive the print data. It should be noted that the print data travels over all three of IPP, HTTP, and TCP/IP protocols between respective ones of IPP clients 17 and IPP server 19.

Although Figure 2 is illustrated with an IPP client/server communication between client modules 14 and CHE 6, other communication protocols, or layers of protocols, may also be used. For example, to facilitate printing that is secure, an SSL (secure socket layer) protocol may be utilized. In such an arrangement, a protocol stack is used, consisting of IPP client 17 over HTTP over SSL over TCP/IP. A complementary arrangement is provided at CHE 6. Similarly, other protocols may be used, and multiple protocols can be used in parallel or in stacked arrangements.

Whatever client/server arrangement is used, the client and servers communicate over a CPSI transport layer that facilitates communication from CPSI client 16. In general, data is pushed in one direction from CPSI client, with little or no data (other than acknowledgements and the like) returning

in the other direction toward CPSI client 16. The actual CPSI transport may use TCP/IP, SMTP, or the like. The sessions may be secure. The CPSI transport layer is configured to hide any differences in the actual transport from CPSI client 16, so that the actual transport is transparent from the viewpoint of CPSI client 16, thereby making CPSI client 16 transport-independent.

CHE 6 includes CPSI server 37, which is complementary in software structure to CPSI client 16, and acts to receive data transmitted from CPSI client 16. CHE 6 further includes spooler 20, which assigns print data received from IPP server 19 and CPSI server 37 to a logical printer corresponding logically to a printer 12, and queues print data for a physical device corresponding to the logical printer. CPSI spooler 20 assigns print data to a logical printer by retrieving a profile from preferences directory 21 which corresponds to a user ID or other address information received with the print data.

Besides address information, preference directory 21 also stores other information relating to subscriber preferences. Such information is set initially by the subscriber, during a registration process, and may thereafter be modified as desired. One such preference is a blocking feature, whereby a subscriber can block printing jobs that are received from particular merchants, or can accept print jobs only if they are received from particular merchants. Another such preference involves selection and configuration of an automatic data/information delivery service. According to this delivery service, and based on subscriber preferences, CHE 6 periodically executes a data gathering application (like application 22) that gathers information from internet sources (such as news, coupons, theater

schedules and the like), packages the information into a print job, and sends the print job to the subscriber's set top box.

5 CPSI spooler 20 is also connected to cable-specific applications such as application 22 through CPSI server 37, IPP server 19, IPP client 18, and CPSI client 23. CPSI client 23 is similar to CPSI client 16. Moreover, application 22 is similar to client application 15, in that it provides an
10 application executed to perform services specific to a client (here, the cable head end) and can deliver print data to CPSI spooler 20.

IPP client 24 is connected to CPSI spooler 20 via CPSI client 38 to allow CHE 6 to communicate
15 with each STB 10. CPSI client 38 is similar to CPSI clients 16 and 23, and again provides for a complementary software architecture and data communications with a CPSI server at the set top box. In this regard, only two of many thousands of
20 STB's are illustrated. Each STB 10 includes IPP server 25 for connection to IPP client 24. It should be noted that, to deliver data from CHE 6 to STB 10, a server is established in STB 10 and a corresponding client is established in CHE 6. In
25 such a case, a preferred transport protocol is again the CPSI transport layer, which is usable regardless of the particular underlying transport (TCP/IP, SMTP, QPSK, DOCSYS, broadband through IP gateway, etc.).

30 Although Figure 2 illustrates an IPP client/server communication between CHE 6 and STB 10, other protocols may also be used. For example, in a situation where the resources available in STB 10 are already strained, it is possible to use SMTP and POP mail protocols to deliver print jobs from
35 CHE 6 to STB 10. Advantages of such an arrangement include the fact that many conventional STB's

already include mail protocols, thereby avoiding a further increase in STB resource usage, firewalls that might exist in CHE 6 will allow mail to go through, multiple mailboxes can be defined in each household, and mail clients (at the client modules) can easily be configured to support print jobs. In the latter situation, CHE 6 and corresponding client modules 14 are also configured for communication via a mail protocol client/server relation, such as an SMTP client/server. Similarly, other protocols can be used between CHE 6 and respective STB 10's, and multiple protocols can be used in parallel or in stacked arrangements.

STB 10 includes CPSI server 39, and further includes CPSI spooler 26, which controls a single queue for a single logical printer corresponding to printer 12. Otherwise, CPSI spooler 26 is nearly identical to CPSI spooler 20, as are CPSI server 39 and CPSI server 37. The limited functionalities of CPSI spooler 26 and CPSI server 39 are advantageous because STB 10 is likely to have limited computing resources. STB 10 also includes STB client application 27, which communicates to CPSI spooler 26 through CPSI client 29, using a subset of the API used by client application 15. This configuration allows an STB user to initiate local print jobs.

Figure 3 illustrates representative software architecture of set top box 10. In general, this software architecture, together with the hardware architecture of the set top box, supports the reception of analog and digital services. In the case of analog services, STB 10 tunes to an analog channel, extracts the NTSC video signal, and drives the local television receiver. In the case of digital services, STB 10 tunes to the appropriate digital channel, extracts MPEG-2 video packets, decrypts, decompresses and routes the

resulting video to an NTSC driver, so as to obtain an NTSC signal to drive the local television receiver. In addition, private data is received over the digital channel. Print jobs can be delivered to STB 10 over a digital channel of digital services, or over private data channel, and is delivered using the CPSI transport. STB 10 reconstructs the packets from the CPSI transport, and routes the data to the addressee, here, IPP server 25.

Through the software architecture illustrated in Figure 3, STB 10 hosts various applications that present to the home user functionality offered by various cable services. Typical applications are a navigator, an interactive program guide, electronic mail and a web browser. Most of these applications are client/server implementations, where STB 10 hosts the client software, and CHE 6 hosts the server software. Communication between client and server over the cable network is facilitated by an operating system executed on STB 10, and is performed through published API's. Depending on the hardware platform and the operating system, those applications may be resident at STB 10, or can be downloaded from servers situated at CHE 6 for execution at STB 10.

Thus, as shown in Figure 3, software architecture and STB 10 includes an interface 31 to hardware, an operating system 32, an HTML engine 34, resident applications 35, and other applications 36. The operating system 32 is usually vendor-specific for the STB, and may include operating systems such as PTV, WinCE, MicroWare or OpenTV. HTML engine 34 provides a group of independent handlers that can be plugged together in conformity to known plug-in specifications so as to provide ability to handle different types of media such as HTML, GIF, MPEG,

HTTP, Java script, etc. The HTML engine 34 is used to allow STB 10 to render HTML documents to a windows manager for display on the local television receiver. HTML documents may be retrieved from local cache, from in-band and out-of-band broadcast carrouseles, VBI streams, HTTP proxy servers located at CHE 6, or remote HTTP servers accessed by the STB user over the internet. In the latter case, documents retrieved from external web servers are filtered by a proxy according to predefined filtering criteria (such as surf watch), which also may convert requested documents into formats supported by the HTML engine 34.

Resident applications 35 include such applications as the aforementioned navigator, interactive program guide, and the like.

Applications 35 and 36 include a web browser, an e-mail program, a print driver for attached printer 12, and the like. Of particular note, these applications include the aforementioned applications from Figure 2, namely IPP server 25, CPSI spooler 26, CPSI client 29, and STB client applications 27.

[RASTERIZATION]

Because of limited resources available within STB 10, print data destined for printer 12 is not forwarded to STB 10 in a high level device-independent print language (such as a page description language like PCL5, PDF, PostScript or the like) for rasterization at STB 10. Such an arrangement, which requires STB 10 to rasterize print data based on a higher level printer language would often overwhelm the availability of resources at STB 10. Accordingly, and because a high speed data communication link exists between CHE 6 and STB 10, rasterization is performed at CHE 6, and

rasterized data is sent from CHE 6 to STB 10 for printout by printer 12. This section describes a preferred implementation for achieving this effect.

Figure 4 shows the overall data flow of a print job from client module 14 such as a remote merchant or a client application executing at CHE 6, through to its final delivery to printer 12 at the home of the STB user. As shown in Figure 4, client application 15 executing in client module 14 generates a print job addressed to one or more printers at one or more STBs. The print job is generated in a high level page description language (PDL) such as PostScript, PDF, HTML, or the like. High level printer languages such as these PDLs are preferred, since they are printer independent, thereby freeing the client application from a need for any knowledge of the configuration of the destination printer 12. The print job in PDL format is delivered over the aforementioned CPSI client 16 from the client module 14 out through to CHE 6 where it is eventually accepted by CPSI spooler 20. At CPSI spooler 20, the print job is rasterized based on knowledge of the configuration and type of destination printer 12, which in turn is obtained by CPSI spooler from preferences directory 21 based on the destination printer address provided by the client module. The rasterized print job is delivered over the aforementioned client/server relationship between CHE 6 and STB 10, where the rasterized print job is eventually accepted by CPSI spooler 26 at STB 10. From there, the rasterized print job is delivered to target printer 12 for printout thereby.

Figure 5 is a flow chart which illustrates this process in further detail. The process steps shown in Figure 5 are stored on a computer readable medium such as an unshown memory at CHE 6 (for those

steps performed by cable head end 6) or an unshown memory at STB 10 (for those process steps executed by set top box 10). Briefly, according to the process steps shown in Figure 5, to print a print job received by a cable head end on a printer connected to a set top box that communicates with the cable head end over a high speed data communication network, the print job is received by the cable head end in a high level printer description language addressed to one or more such printers. Based on the address, the cable head end obtains a software driver for the printer, the software driver corresponding to configuration and type of the addressed printer. A logical printer is created in the cable head end (if a logical printer does not already exist), the logical printer corresponding to the software driver, and the logical printer is executed so as to rasterize the high level printer description language print job into a rasterized bit map image format. The rasterized bit map image format is transmitted over the high speed data communication network to the set top box addressed in the print job. At the set top box, the set top box creates a logical printer corresponding to its locally connected printer (if a logical printer does not already exist), with the logical printer accepting as its input the rasterized bit map image data. The rasterized bit map image data is sent to the set top box's logical printer, which in turn routes the print job to the locally connected printer.

In more detail, Figure 5 shows steps S501 through S515 that are performed at CHE 6, and steps S516 through S520 that are performed at STB 10. In step S501, cable head end 6 receives a print job from a client application. The print job is preferably in a high level printer description

language (PDL) which is printer independent. In addition, the print job includes one or more addresses identifying the destination or destinations for the print job. The addresses may
5 be in any convenient format agreed to mutually between cable head end 6 and the client applications.

It is envisioned that the print jobs received by cable head end 6 are print jobs from
10 merchants located remotely and connected to cable head end 6 via the internet. Examples of merchants and corresponding print jobs include a bank that prints out bank statements directly into a customer's home, utility companies that print out
15 utility bills directly at a consumer's home, advertisers that printout advertisements and/or coupons directly at a consumer's home, newsletter/news clipping services that print out periodicals directly in a reader's home, and the
20 like. It is also possible for the print job to be delivered from a client application executing at cable head end 6, for example, a client application 22 that generates a monthly cable guide for printout in a viewer's home, a news retrieval service which,
25 based on automatic searches performed in accordance with user preferences over the internet, obtains news from a variety of internet sources, collates such news, and prints news out directly in a news reader's home, and the like. Multiple other
30 arrangements are easily envisioned. What is preferable in the context of the invention, however, is that the print job is received by CPSI spooler 20 in cable head end 6 in a printer-independent format such as the aforementioned printer description
35 languages.

In step S502, and based on the printer addresses received with the print job, CHE 6

accesses preferences directory 21 so as to retrieve
user profiles for the users corresponding to the
printers to which the print job is ultimately
destined. User profiles preferably include at least
5 an identification of printer configuration and type
of printer 12 connected to the user's set top box.
Other information may also be included in the user
preference. One such piece of information is a
blocking filter, which specifies filtering applied
10 to the print jobs, thereby to permit a user to
exclude unwanted print jobs. For example, so as to
avoid a proliferation of unwanted print jobs at his
home printer, a user may specify preferences
instructing cable head end 6 to block print jobs
15 from specific sources, or to allow print jobs only
from specific sources. Any such preferences are
applied in step S503 in which CHE 6 determines
whether or not to reject the print job. If the job
is rejected, flow branches to step S504 so as to
20 reject the job and, possibly, to inform client
module 14 that the job has been rejected.

If the print job is accepted for printout,
flow advances to step S506 in which the print job is
scheduled and deposited in the subscriber's queue,
25 and the step S507 in which the cable head end
determines whether a print driver exists for the
printer to which the print job is destined. A print
driver might not exist for a variety of reasons.
One such reason is that the cable head end does not
30 have available a software module corresponding to
the printer defined in the user profile. In such a
circumstance, cable head end 6 simply accesses an
internet provider of such a software driver, such as
an internet site corresponding to the printer
35 manufacturer. One more common situation in which a
driver might not exist, however, is a situation in
which the user profile does not contain any

identification of printer configuration or type.
Such a situation is addressed in steps S509 and
S510, to which CHE 6 branches in a situation where a
driver does not exist for failure of the user
5 profile to specify a printer.

Thus, in step S509, CHE 6 communicates
directly (via CPSI spooler 20, CPSI client 38, and
IPP client/server 24 and 25) to the destination STB
10, with a request for STB 10 to provide an
10 identification of configuration and type for printer
12 connected to STB 10. STB 10 responds with the
needed information, which is obtained by CHE 6. In
step S510, CHE 6 loads the driver corresponding to
the identification information provided from STB 10,
15 and in addition updates the user profile in
preferences directory 21, so that future print jobs
can be performed more readily, without the need for
communication with STB 10 for the purpose of
determining printer identification.

20 In any event, once a driver exists, flow
advances to steps S511 and S512, in which CPSI
spooler 20 in CHE 6 determines whether a logical
printer corresponding to the print driver already
exists, or if one needs to be created. A logical
25 printer will already exist if a prior print job has
already been processed. Using the logical printer,
CPSI spooler feeds the print job in the printer-
independent PDL format to the logical printer, such
that the logical printer rasterizes the print job
30 into a printer-specific rasterized bit map image
(step S514). It should be understood that the
rasterized bit map image print job is not simply a
fully bit map raster of the print job. Rather, the
rasterized bit map print job is a bit-by-bit
35 representation of the print job tailored
specifically for the printer corresponding to the
logical printer in CPSI spooler 20. As one example

of printer-specific rasterization, many printers require print commands embedded in the print job, so as to enable control over the printer. Examples of such print commands include start-of-page, advance-down, eject-page, load-new-page, and the like. Such printer-specific commands are embedded in the rasterized print job. As a further example, some printers, such a bubble jet printers, print in bands, and embedded commands are needed so as to define such bands. As yet a further example, some bubble jet printers that print in color require print data to be supplied out of sequence for each different color, so as to accommodate physical differences in location between printing jets for one color relative to printing jets for another color. Whatever the source of printer specificity, the rasterized bit map print job created by the logical printer in step S514 is printer-specific, tailored directly based on the identity of printer configuration and type of printer 12.

Step S515 transmits the rasterized bit map print job to STB 10. As described above, the transmission to STB 10 is from CPSI spooler 20, via CPSI client 38, IPP client/server 24 and 25, to CPSI server 39 and spooler 26 in STB 10.

At the set top box, step S516 receives the rasterized bit map print job in CPSI server 39 and forwards it to CPSI spooler 26. If a logical printer does not already exist in CPSI spooler 26, then a logical printer is created based on the identity of printer type and configuration for attached printer 12 (steps S517 and S519). In step S520, CPSI spooler, using the logical printer, executes the rasterized bit map print job so as to send the print job to printer 12 where it is rendered into a visible printed image.

[PUSH PRINTING]

As described previously, the purpose of the CPSI architecture is to offer facilities that will enable applications running anywhere on the internet to print on printers attached to set top boxes. Such printing is referred to as "push printing" in the sense that the remote applications push print data through the cable head end to the set top box for printout at an attached printer.

Of course, it is possible to provide the set top box with its own printing capability, so as to enable a user to print data as desired. Such printing is referred to as "pull printing", in the sense that the user of the set top box pulls data for printout from sources remote from him. For example, a user may, as part of browsing the internet, come across a web page of interest, and may request printout of such a web page. Such printout is "pull printing" and is different from "push printing" described hereafter.

General printing goals of the architecture described above and hereinafter include the ability to support attachment and software and driving of any supported printer, as well as the elimination of any need for a user to intervene in installation of a printer beyond physical connection to the set top box. Because of a uniform API, software maintenance costs are reduced. In addition, by virtue of the CPSI software architecture, printing does not interfere with other programs running on the set top box, such as web browsing applications or television viewing. In addition, the CPSI architecture is portable across a variety of platforms, and supports a variety of different operating systems, particularly those operating systems that maintain execution in the set top box itself.

Push printing in particular represents a model in which print action is initiated by an entity other than the set top box user. It is assumed that this entity, which actually may either
5 be local to the cable head end or be an internet citizen, owns the document for which the print job is desired, or is able to reference it. Two different printing modes are contemplated:

1. Unicasting, which refers to a point-to-point connection in which a remote internet site
10 sends print data separately to each destination client; and

2. Multicasting, which refers to a mode in which a single copy of the print data is sent to
15 multiple destination points. Multicasting can also include broadcasting, in which a single copy of print data is sent to all destination points rather than to a selected subcast thereof.

Examples of print jobs subject to push
20 printing include merchant-initiated print jobs from remote internet sites. Such merchant-initiated print jobs may include constant content print jobs, such as a flyer advertising particular items for sale. The flyer can be printed in a unicast or
25 unicast or multicast mode, and is delivered in the appropriate unicast or multicast mode from the cable head end to the appropriate set top boxes. Merchant initiated print jobs can also include variable content print jobs such as personalized statements like retailing,
30 a bank statement or a utility bill. Based on a client application running at the merchant's server, the print job is created, and submitted to the cable head end. Again, the cable head end delivers the print job in either unicast or multicast mode, as
35 requested by the print job to the set top box or boxes in question.

Generalized goals of merchant initiated printout from remote internet sites include the following. First, the merchant is able to submit the print job at its own internet site, by means of a client application running on the merchant's CPU. The merchant is able to specify parameters for the print job, including destination address and whether or not the transmission is via secured or unsecured transmission. The destination address may specify unicast or multicast printing, meaning that the destination address might identify only a single recipient, or might represent multiple recipients or a group of recipients. The print job is generated in non-proprietary device independent format, by use of widely available client applications, or even customized print applications, that print through standardized and device independent format. This is achieved through separation of the print submission client and the content creation tool: the content creation tool is left to the merchant, whereas the print submission client is embodied in the CPSI client described above. At the cable head end, resident software maintains a directory of user profiles in preferences directory 21, the profiles including subscriber name, subscriber account number, address, printer model, set top box capabilities, any blocking filters, and policy data. The CPSI spooler at the cable head end discards print jobs that meet criteria specified by blocking filter data, or accepts only print jobs that meet other specified criteria. A system administrator at the cable head end is able to display a print queue, indicating global print jobs for all cable subscribers, or print jobs on a per user basis. Using such a print queue, the system administrator is able to examine the status of jobs in the queue, and the status of corresponding printers attached to

set top boxes, and is further able to delete jobs in the queue and override any of user selectable print options. The cable head end spooler does not commence a print job until it has ascertained that the set top box is ready to accept print data, and that the attached printer is ready and on line. Preferably, the CPSI spooler in the set top box is able to commence a print operation before the entire print job has been downloaded from the cable head end, and is further able to confirm successful completion of print jobs.

Figures 6A, 6B and 6C illustrate general arrangements for unicast (point-to-point) printing and multicast (one-to-many) printing. As shown in Figure 6A, unicast printing involves printout of a print job from a remote web server to a specifically identified printer attached to a set top box. The print job is routed via the internet to the cable head end, and thence over the digital cable network to the set top box for printout at the destination printer. Figure 6B illustrates an alternative form of unicast printing, in which a remote web server gathers data from multiple different web sites, aggregates the data into a single print job, and then push-prints the resulting print job to a destination printer. Of course, although the aggregating server is illustrated as a remote web server, it is possible for an aggregation application to execute within the cable head end, communicate over the internet to multiple different web sites for collection of aggregate data, to aggregate the data at the cable head end, and then to push-print the aggregated print job to a destination set top box.

Figure 6C shows multicast printing in which a remote web server generates a print job having multiple destination printers. The print job is

5 routed to the cable head end via the internet, which thereupon routes the print job, in a multicast or broadcast configuration, over the digital cable network to multiple different set top boxes for printout by respective printers attached thereto.

10 Figures 7A and 7B are flow charts showing respective processing by the cable head end and by the set top box in response to a print job. Referring first to Figure 7A, step S701 illustrates receipt by the cable head end of a print job from a remote internet source, or from an application such as 22 at the cable head end. In step S702, the cable head end retrieves the user profile from directory 21 (Figure 2). Based on the user profile, 15 cable head end determines (in step S703) whether or not to accept or to reject the job. If the job is rejected, flow advances to step S705 and the job is not processed further. It is possible for step S705 to send information back to the upstream remote 20 internet site, indicating that the job has been rejected.

On the other hand, if the job has not been rejected, flow advances to step S706, in which, based on destination information included with the 25 print job, the cable head end determines the destination address or addresses for the print job. Steps S707 and S709 create logical printers if they are needed. That is, if a corresponding logical printer or printers do not already exist in spooler 30 20, the needed logical printer or printers are created in CPSI spooler 20 (Figure 2), with a separate logical printer being created for each different printer needed to accomplish the unicast or multicast printing. That is, in a unicast mode, 35 since only a single printer is involved, then only a single logical printer corresponding to the printer in question is created. On the other hand, in a

multicast or broadcast mode, multiple users and multiple printers are the destination for the print job. It is possible, however, for several of the multiple users to employ the exact same printer and printer configuration. As a consequence, although it is likely that multiple logical printers are created in the CPSI spooler at the cable head end, it is equally likely that a single logical printer will be able to support several users because each of the several users will have exactly the same printer type and configuration.

The print job is thereafter scheduled and deposited into the user's queue (step S710), for rendering by the logical printers (or spooled for subsequent rendering just prior to delivery to the STB). It is possible to render the print jobs into a bit map rasterized format, as discussed above in connection with Figure 5, but this is not ordinarily necessary. Rather, all that is necessary is for the logical printers to process the print job for subsequent use by the set top boxes.

In step S711, the print job from each logical printer is unicast or broadcast to the destination address or addresses. Thereafter, in step S712, the cable head end builds a notification server so as to await notification of printout from each of the set top boxes to which print data has been transmitted.

Figure 7B illustrates process steps performed by the set top box in response to receipt of a print job transmitted from the cable head end over the digital cable network. Thus, in response to receipt of a print job (step S720), the set top box executes the print job (step S721) so as to print the print job on its attached printer. It is possible for the set top box to utilize the CPSI spooler arrangement discussed above in connection

with Figure 5, but this is not mandatory. Rather, according to this aspect of the invention, it is only necessary for the set top box to receive the print job and to cause its attached printer to print it.

In step S722, the set top box builds a notification client for communication with the corresponding confirmation server built at the cable head end in connection with step S712. The notification client in the set top box then communicates with the notification server at the cable head end (step S723) so as to notify the cable head end of ongoing print status. In particular, the notification client at the set top box notifies the cable head end as each sheet of the print job is commenced, as each sheet is concluded, and as the print job is concluded. In addition, the notification client permits interaction from the user at the set top box, whereby the user at the set top box can modify his print queue by cancelling jobs or advancing jobs out of sequence from the queue.

At the cable head end, and based on information received from the notification client at the set top box, the cable head end can distribute print status information as appropriate. For example, it is possible for the cable head end to transmit print status back to the originating merchant at the remote internet site, so as to permit the merchant to confirm that the print job has been successfully completed. Alternatively, or in addition, it is possible for the cable head end to utilize the print status information so as to monitor, maintain and manage print queues for each and every one of the set top boxes connected to the digital cable network.

Figure 8 illustrates the relationship of the notification client created in the set top box and the notification server created in the cable head end. In Figure 8, the same reference numerals as those used in Figure 2 are utilized whenever the functions are the same. What is shown further in Figure 8 is notification client 40 created by set top box 10, for monitor of the status of the print job being spooled to printer 12 by CPSI spooler 26. Notification client 40 transmits printer status information back to notification server 41 in CHE 6 for use by CPSI spooler 20 to monitor and manage print queues, and to provide notification information of successful printout back to client modules 14. Notification client 40 and notification server 41 communicate over the digital cable network 42, using the same physical wire as that used by IPP client and server 24 and 25.

By virtue of the foregoing arrangement, push printing from remote internet sites is facilitated at printers connected to set top boxes that are fed data from a cable head end and via a digital cable network. The push printing can be unicast or multicast. In addition, notification of print status is provided from the set top box back to the cable head end, thereby permitting confirmation of printout to the remote internet merchant, or maintenance and management of print queues from the cable head end.

[SECURE PRINTING]

The ability of the present invention to provide push-printing as discussed immediately above, allows a merchant having internet client application 15 to send print data through CHE 6 to a subscriber at the subscriber's STB 10. For instance, a merchant having an internet application,

such as a bank or credit card services company, generates print data which corresponds to a particular subscriber, such as a banking statement or a credit card statement, for automatic printing on the printer which is locally attached to the set top box of the subscriber. It can be appreciated that such print data is of a confidential nature and that it would be preferable to have the print data sent to STB 10 in a secure manner. As such, the present invention provides the ability to allow client application 15 to push-print confidential print data to a subscriber at STB 10 via CHE 6 in a secure manner.

Figure 9 illustrates a first embodiment for secure printing of print data from client application 15 in client module 14 to STB 10 via CHE 6 for printing on printer 12. In this embodiment of secure push-printing, both CHE 6 and STB 10 are considered to be trusted environments. A trusted environment is one which can be trusted to receive data and to access and/or maintain the data in a trusted manner so as to prevent misuse of the data or transfer of the data to non-trusted environments.

First, as illustrated in Figure 9, secure printing is achieved by establishing a secure connection between client application 15 and CHE 6, and between CHE 6 and set top box 10. Specifically, the preferred embodiment utilizes a secure protocol between CPSI client 16 and CPSI server 37 to establish a secure connection between client application 15 and CHE 6. A secure protocol, such as secure sockets layer (SSL) protocol, is used in addition to the previously described protocols between client application 15 and CHE 6 in order to achieve secure push-printing. Figure 10 depicts the protocol layers that are preferably utilized between client application 15 and cable head end for secure

push-printing. The protocol layers, often referred to as a protocol stack, are described in Figure 10 from the perspective of a communication path between CPSI client 16 and CPSI server 37. Specifically, it can be seen from Figure 10 that CPSI protocol 1001 is the top layer communication protocol between CPSI client 16 and CPSI server 37. Directly below CPSI protocol 1001 is IPP protocol layer 1002 which provides the printing specific protocol for communication between IPP client 17 and IPP server 19, which are in direct communication with CPSI client 16 and CPSI server 37, respectively. HTTP protocol 1003 may also be utilized for communication between client application 15 and CHE 6 and is located directly below IPP protocol layer 1002. SSL protocol layer 1004 resides directly below HTTP protocol layer 1003 so as to provide for a secure communication path between CPSI client 16 and CPSI server 37. Directly below SSL protocol layer 1004 is the underlying transport layer 1005 which may be comprised of TCP/IP, or other such transport protocols. In this manner, secure transport of print data from client application 15 to CHE 6 is made possible. The present invention is not limited to the use of SSL, and any other secure protocol or secure transport mechanism may be utilized to accomplish the same result.

Returning to Figure 9, the secure connection between client application 15 and CHE 6 is established through the use of the above-described protocols, therefore providing a path from client application 15 through CPSI client 16, and IPP client 17 to IPP server 19 and CPSI server 37, respectively. In the preferred embodiment, the connection is established upon the receipt by client application 15 of a certificate from CHE 6 via the SSL protocol 1004. The certificate is preferably

signed by a trusted third party and is used to verify that client application 15 is really communicating with CHE 6. In this manner, CHE 6 is authenticated by client application 15. Print data is then sent in a secure manner from client application 15 to CPSI spooler 20 in CHE 6 through the secure connection. It is also possible for client application 15 provide a signed certificate to CHE 6 so that CHE 6 can authenticate the identity of client application 15. In this manner, client application 15 and CHE 6 are mutually authenticated, thereby ensuring that client application 15 is sending the confidential data to the correct destination and ensuring that CHE 6 verifies the identity of the source of the confidential source. It can be appreciated that such mutual identification is preferable for print data comprising a bank statement or a utility bill.

In the embodiment illustrated in Figure 9, the print data is provided to CPSI spooler 20 along with the identification information related to the subscriber to whom the print data is to be sent. The print data is provided from client application 15 to CPSI spooler 20 in a device-independent format. CPSI spooler 20 then refers to preferences directory 21 to obtain the necessary information corresponding to the subscriber, such as the print driver information for printer 12 connected to STB 10 corresponding to the subscriber. CPSI spooler then transforms the print data from the device-independent format into a rasterized format by using a printer driver which corresponds to printer 12. The rasterized print data is then spooled by CPSI spooler 20 of CHE 6 for transmission to STB 10.

The print data is then ready to be sent directly to CPSI spooler 26 of STB 10 for immediate printing on printer 12. This is accomplished by

establishing a secure connection between CHE 6 and STB 10 in a similar manner to the secure connection between client application 15 and CHE 6 as described above. In the preferred embodiment, CHE 6 receives
5 a certificate from STB 10 so that cable head end can verify the identity of STB 10, whereupon a secure connection is established between CHE 6 and STB 10. As discussed above, mutual authentication can also be implemented so that STB 10 can verify the
10 identity of CHE 6. Once the secure connection is established between CHE 6 and STB 10, CHE 6 sends the rasterized print data to STB 10. CPSI spooler 26 in STB 10 then automatically passes the rasterized print data to printer 12 for printing,
15 thereby providing the confidential data to the subscriber in a secure fashion. It should be noted that although the above description involves confidential print data being sent in a secure manner to only one subscriber, the same method may
20 be utilized for providing confidential information from internet client application 15 to many subscribers, wherein the confidential print data is unique and customized for each single subscriber (unicast). In addition, the above method may also
25 be utilized for secure push-printing of the same print data to many individual subscribers (broadcast/multi-cast).

In addition to the embodiment for secure push-printing as described in Figure 9, secure push-
30 printing may also be achieved when CHE 6 is not a considered a trusted environment by client application 15. Secure push-printing can still be accomplished according to the embodiment described in Figure 11. As can be seen by comparison between
35 Figure 11 and Figure 9, this embodiment is nearly identical to that of Figure 9 except that the connection between client application 15 and CHE 6,

and the connection between CHE 6 and STB 10 are not necessarily secure and are treated as though they are not secure. Therefore, the print data is transformed from device-independent print data to rasterized print data in the client application 15 prior to being sent to CHE 6 for transmission to STB 10 over the digital cable network. Specifically, client application 15 has access to a printer driver which corresponds to printer 12 which is locally attached to the subscriber's STB 10. Client application 15 therefore renders the print data for printing on printer 12 by transforming it from a device-independent format to rasterized print data specific to printer 12 of the particular subscriber. The rendering of the print data is performed by client application 15 in client module 14 in this embodiment, as opposed to within CHE 6 in the embodiment of Figure 9, because in this embodiment CHE 6 is not known considered a trusted environment by client application 15 and therefore cannot be trusted to render the print data for printing on printer 12. Preferably, client application 15 also encrypts the print data prior to sending it to CHE 6 for subsequent transmission to STB 10, thereby providing additional security to the print data.

Referring again to Figure 11, the rasterized, encrypted print data is sent from client application 15 to CHE 6 over the normal connection utilizing CPSI client 16, IPP client 17, IPP server 19 and CPSI client 37, respectively. It should be noted that although a secure connection using SSL is not required in this embodiment, it may be used to provide additional security. CPSI spooler 20 of CHE 6 does not render the data because it is already rasterized but instead simply recognizes the destination information provided in a header section of the encrypted, rasterized data and then spools

the rasterized data for transmission to the appropriate subscriber. The encrypted, rasterized data is then sent from CHE 6 to STB 10 via CPSI client 38, IPP client 24, IPP server 25 and IPP server 39 respectively. Similar to the connection between client application 15 and CHE 6, this connection does not need to be secure through the use of the SSL protocol, although it may be secure for additional protection. In this manner, CPSI spooler 26 of STB 10 receives the encrypted, rasterized data from CHE 6. CPSI spooler 26 then decrypts the rasterized print data and then automatically sends the rasterized print data directly to printer 12 for printing, therefore providing the subscriber with the confidential print data in a secure fashion. Unlike the embodiment described in Figure 9, this is accomplished even though CHE 6 is not a trusted environment by sending the print data from client application 15 to STB 10 in an encrypted, rasterized format, whereby CHE 6 is used as an interim server.

Figure 12 provides a flow chart which describes the steps for accomplishing secure push-printing pursuant to the two embodiments described above. In step S1201, client application 15 generated print data related to a specific subscriber, such as a bank statement. Next, it is determined whether or not CHE 6 is considered a trusted environment. (Step S1202). If CHE 6 is a trusted environment, control proceeds to step S1203 in which it is determined if a secure connection can be established between client application 15 and CHE 6, as discussed above. If a secure connection cannot be established between client application 15 and CHE 6, the print job is rejected in step S1204. If a secure connection is established between client application 15 and CHE 6, control proceeds to step

S1205 in which client application 15 sends the print data in a device-independent format to CHE 6. CHE 6 then renders the print data in step S1206, as previously described, and spools the print data for transmission to STB 10.

In step S1207, it is determined if a secure connection can be established between CHE 6 and STB 10, as discussed above. If a secure connection cannot be established between CHE 6 and STB 10, the print job is rejected in step S1208. If a secure connection is established between CHE 6 and STB 10, control proceeds to step S1209 in which the rasterized print data is sent from CHE 6 to STB 10. Then, in step S1210, STB 10 automatically passed the rasterized print data to printer 12, upon which printer 12 prints the rasterized print data (step S1216).

Returning to step S1202, if CHE 6 is not considered a trusted environment, control proceeds to step S1211 in which client application 15 rasterizes the print data and also encrypts the print data so that it may be sent to STB 10 via CHE 6 in a secure fashion. Client application 15 sends the encrypted, rasterized print data to CHE 6 in step S1212 with a header that indicates the destination information for the print data and which indicated that the print data has already been rasterized. In step S1213, CHE 6 obtains the destination information that was sent with the encrypted, rasterized print data, spools the encrypted, rasterized, print data for transmission to STB 10, and then transmits the encrypted, rasterized, print data to STB 10. STB 10 then decrypts the encrypted, rasterized print data in step S1214, after which STB 10 sends the decrypted, rasterized print data to printer 12 (step S1215).

Printer 12 then prints the rasterized print data in step S1216.

Thus, whether or not cable head end 6 is considered a trusted environment, confidential print data from client application 15 on the internet, such as a bank, can be sent in a secure manner from client application 15 to set top box 10 on a digital cable network through the cable head end 6 for automatic printing on printer 12 that is locally attached to set top box 10. In this manner, a subscriber on a digital cable network can automatically receive monthly billing statements or bank statements from a corresponding internet application maintained by the billing service or bank in a secure manner, thereby preventing misuse or improper access by others of the information contained therein.

[REMOTE PLUG-AND-PLAY]

The configurations described above for the present invention are provided to allow printing from client module 14 to STB 10 via CHE 6, wherein the print data is formatted for printing on printer 12 either at CHE 6 by CPSI spooler 20 or at the client application 15 of client module 14. In those configurations, the print data is generally provided to STB 10 in a rasterized format required for printing directly to printer 12 without the need for utilizing a printer driver in STB 10. The utilization of a printer driver in STB 10 is necessary, however, when a user of STB 10 wishes to print locally, such as when printing a web page that the user is viewing on the television to which STB 10 is attached. A printer driver in STB 10 would also be necessary in instances when print data is provided from CHE 6 to STB 10 in a device-independent format. In such situations, and in

others not discussed herein, an appropriate printer driver corresponding to printer 12 needs to be provided for use in STB 10.

5 Depending on the capabilities of STB 10, a printer driver could be loaded in a variety of ways. For example, if the set top box has sufficient memory capacity, a number of printer drivers could be pre-loaded into the memory of STB 10 for several different printers. In the alternative, STB 10 may
10 allow a floppy disk drive or CDROM, or the like, to be interfaced to STB 10 such that printer drivers could be accessed from a floppy disk or CDROM.

In the set top box environment of the present invention, it is appreciated that a user may
15 prefer to utilize the digital cable network in order to obtain and load a printer driver. Therefore, the present invention provides a manner in which to provide a remote plug-and-play service whereby CHE 6 locates and provides an appropriate printer driver to STB 10 upon request by STB 10, thereby supporting
20 the attachment of a local printer to STB 10.

This feature of the present invention is described in Figure 13, which depicts a sequence of steps for accomplishing a preferred embodiment of
25 the remote plug-and-play feature for supporting a local printer attached to STB 10. In step S1301, the subscriber plugs printer 12 into STB 10 via the interface provided by STB 10 for printers. This interface may comprise a universal serial bus (USB),
30 an RS-232 interface, or other printer connection. Next, in step S1302, STB 10 determines that a new printer has been plugged in and that STB does not have a printer driver corresponding to the new printer. This detection is achieved via hardware
35 interface 31 and operating system 32 of STB 10. Client application 27 of STB 10 obtains an indication from operating system 32 that a printer

driver is needed for printer 12. STB client application 27 then sends a request to CHE 6 to obtain a printer driver that corresponds to printer 12. The request is sent from STB 10 to CHE 6 via the digital cable network, but not necessarily through the IPP protocol, because print data is not involved in this transaction. Therefore, it can be appreciated that any of the underlying transport protocols such as TCP/IP, may be utilized to send the request from STB client application 27 in STB 10 to CHE application 22 in CHE 6 (step S1303).

It should be noted that the request for printer driver from STB client application 27 preferably includes the information necessary to identify printer 12, such as the manufacturer and model of printer 12. Next, in step S1304, CHE application 22 receives the request for printer driver from STB 10. CHE application 22 then accesses preferences directory 21 to obtain hardware and operating system information which describes STB 10 (step S1305). This information is necessary to determine which type of printer driver should be obtained and sent to STB 10. For instance, the set top box may comprise one of several currently available set top boxes, such as the Explorer 2000 by Scientific Atlanta, the DCT 5000+ by General Instrument, and the Streammaster by Motorola. In addition, the appropriate printer driver must correspond to the operating system implemented in the set top box. For instance, the Explorer 2000 utilizes the Power TV operating system, the DCT 5000+ utilizes the WinCE operating system, and Streammaster utilizes either the MicroWare or the Open TV operating system.

In step S1306, CHE application 22 obtains a printer driver that is appropriate for the manufacturer and model of printer 12 and for the

hardware type and operating system of STB 10. CHE application 22 may obtain this printer driver from one of many sources. For example, the needed printer driver may already be stored in a memory of CHE 6 and accessible via preferences directory 21 for another subscriber on the digital cable network. In the alternative, CHE 6 may have several printer drivers available in a memory device such as a hard drive, CDRom, or the like. In another alternative, CHE application 22 may utilize internet proxy 5 to access world wide web 4 so as to obtain the necessary printer driver for STB 10, such as from the printer manufacturer's web site. Once the appropriate printer driver is found by CHE application 22, CHE application 22 then sends the printer driver to STB 10 via the digital cable network (step S1307). As mentioned previously, any of the available transport protocols for communication between CHE 6 and STB 10 may be utilized to download the printer driver from CHE 6 to STB 10. Once STB 10 receives the printer driver, STB 10 loads the printer driver in local memory for subsequent use and registers the printer driver with operating system 32 of STB 10 for future reference (step S1308).

In step S1309, CHE 6 obtains another printer driver for use by CHE 6 to send print data to STB 10. CHE 6 determines which printer driver to obtain for its own use based upon the information describing printer 12 provided by STB 10 and based upon the type of hardware and operating system which comprise CHE 6. As described above, CHE 6 may obtain the printer driver from any one of several resources, such as world wide web 4. CHE application 22 updates preferences directory 21 so as to record the new printer driver that corresponds to printer 12 for use by CHE 6 (step S1310). In

this manner, CHE 6 maintains a printer driver which corresponds to printer 12 so that CHE 6 may render print data appropriately the next time print data is provided from CHE 6 to STB 10 for printing on printer 12. In addition, this feature of the present invention also provides an easy and transparent plug-and-play mechanism for the user of STB 10 to connect and utilize printer 12 to STB 10.

It is emphasized that several changes and modifications may be applied to the above-described embodiments, without departing from the teaching of the invention. It is intended that all matter contained in the present disclosure, or shown in the accompanying drawings, shall be interpreted as illustrative rather than limiting. In particular, it is to be understood that any combination of the foregoing embodiments may be utilized, so that the specifics of any one embodiment may be combined with any of the other or several other embodiments.

WHAT IS CLAIMED IS:

1. A method for the secure printing of
print data from a client application residing on a
5 data network to a set top box which has a printer,
said set top box residing on a digital cable network
which has a cable head end for interfacing said
digital cable network to said data network, said
method comprising the steps of:

10 generating print data in said client
application;

determining whether a secure communication
path exists between said client application and said
set top box;

15 transmitting, in response to a
determination that said secure communication path
exists, said print data from said client application
to said set top box; and

20 sending said print data from said set top
box to said printer for printing.

2. A method according to Claim 1, wherein
the step for determining whether a secure
communication path exists between said client
25 application and said set top box includes the use of
a secure protocol between said client application
and said cable head end, and between said cable head
end and said set top box.

30 3. A method according to Claim 2, wherein
the step for determining whether a secure
communication path exists between said client
application and said set top box further includes a
confirmation through said secure protocol, that said
35 cable head end is a secure location, and a
confirmation, through said secure protocol, that
said set top box is a secure location.

4. A method according to Claim 1, wherein the step for transmitting, in response to a determination that said secure communication path exists, said print data from said client application to said set top box includes sending said print data from said client application to said cable head end in a device-independent format, transforming said print data from said device-independent format to a rasterized format which corresponds to said printer, and then sending said print data in said rasterized format from said cable head end to said set top box for printing on said printer.

5. A method according to Claim 1, wherein the set for transmitting, in response to a determination that said secure communication path exists, said print data from said client application to said set top box includes encrypting said print data, sending said encrypted print data from said client application to said cable head end, sending said encrypted print data from said cable head end to said set top box, decrypting said print data, and sending the decrypted print data to said printer for printing.

6. A method according to Claim 3, wherein said confirmation that said set top box is a secure location is sent from said set top box to said cable head end.

7. A method according to Claim 3, wherein said confirmation that said cable head end is a secure location is sent from said cable head end to said client application.

8. A method according to Claim 1, wherein the step for transmitting, in response to a

determination that said secure communication path exists, said print data from said client application to said set top box includes transforming, by said client application, said print data from said device-independent format to a rasterized format which corresponds to said printer, sending said print data in said rasterized format from said client application to said cable head end, and then sending said print data in said rasterized format from said cable head end to said set top box for printing on said printer.

9. A method according to Claim 2, wherein said secure protocol is a secure sockets layer protocol.

10. A method according to Claim 2, wherein the step for determining whether a secure communication path exists between said client application and said set top box includes the transmission of at least one certificate from said set top box to said cable head end and the transmission of at least one certificate from said cable head end to said client application.

11. A method for the secure printing of print data from a client application residing on a data network to a set top box which has a printer, said set top box residing on a digital cable network which has a cable head end for interfacing said digital cable network to said data network, said method comprising the steps of:

generating print data in said client application;
determining that a secure communication path exists between said client application and said cable head end upon receipt through a secure

protocol of a confirmation from said cable head end
that said cable head end is a secure location;

5 sending, in response to a determination
that said secure communication path exists, said
print data from said client application to said
cable head end in a device-independent format;

 transforming in said cable head end, said
print data from said device-independent format to a
rasterized format which corresponds to said printer;

10 determining that a secure communication
path exists between said cable head and said set top
box upon receipt, through a secure protocol, of a
confirmation from said set top box that said set top
box is a secure location; and

15 sending, in response to a determination
that said secure communication path exists, said
print data in said rasterized format from said cable
head end to said set top box for printing on said
printer.

20 12. A method for the secure printing of
print data from a client application residing on a
data network to a set top box which has a printer,
said set top box residing on a digital cable network
25 which has a cable head end for interfacing said
digital cable network to said data network, said
method comprising the steps of:

 generating print data in said client
application;

30 transforming, in said client application,
said print data from said device-independent format
to a rasterized format which corresponds to said
printer;

35 encrypting, in said client application,
said print data in said rasterized format;

sending said encrypted print data in said rasterized format from said client application to said cable head end;

5 sending said encrypted print data in said rasterized format from said cable head end to said set top box; and

10 decrypting, in said set top box, said print data in said rasterized format for printing on said printer.

13. An apparatus for the secure printing of print data from a client application residing on a data network to a set top box which has a printer, said set top box residing on a digital cable network which has a cable head end for interfacing said digital cable network to said data network, comprising:

15 a program memory for storing process steps executable to perform a method according to any of Claims 1 to 12; and

20 a processor for executing the process steps stored in said program memory.

25 14. Computer-executable process steps stored on a computer readable medium, said computer-executable process steps for the secure printing of print data from a client application residing on a data network to a set top box which has a printer, said set top box residing on a digital cable network which has a cable head end for interfacing said digital cable network to said data network, said computer-executable process steps comprising process steps executable to perform a method according to any of Claims 1 to 12.

35 15. A computer-readable medium which stores computer-executable process steps, the

computer-executable process steps to achieve the
secure printing of print data from a client
application residing on a data network to a set top
box which has a printer, said set top box residing
5 on a digital cable network which has a cable head
end for interfacing said digital cable network to
said data network, said computer-executable process
steps comprising process steps executable to perform
a method according to any of Claims 1 to 12.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215

ABSTRACT

Secure printing of print data from a client application residing on a data network to a set top box which has a printer, said set top box residing on a digital cable network which has a cable head end for interfacing said digital cable network to said data network, wherein print data is generated in said client application after which it is determined whether a secure communication path exists between said client application and said set top box. If the secure communication path exists, the print data is transmitted from said client application to said set top box. The print data is then sent from the set top box to the printer for printing.

E-19951

FIG. 1 is a schematic diagram of a network architecture for a cable television system. The diagram illustrates the flow of data and services from a Service Infrastructure to end-user devices.

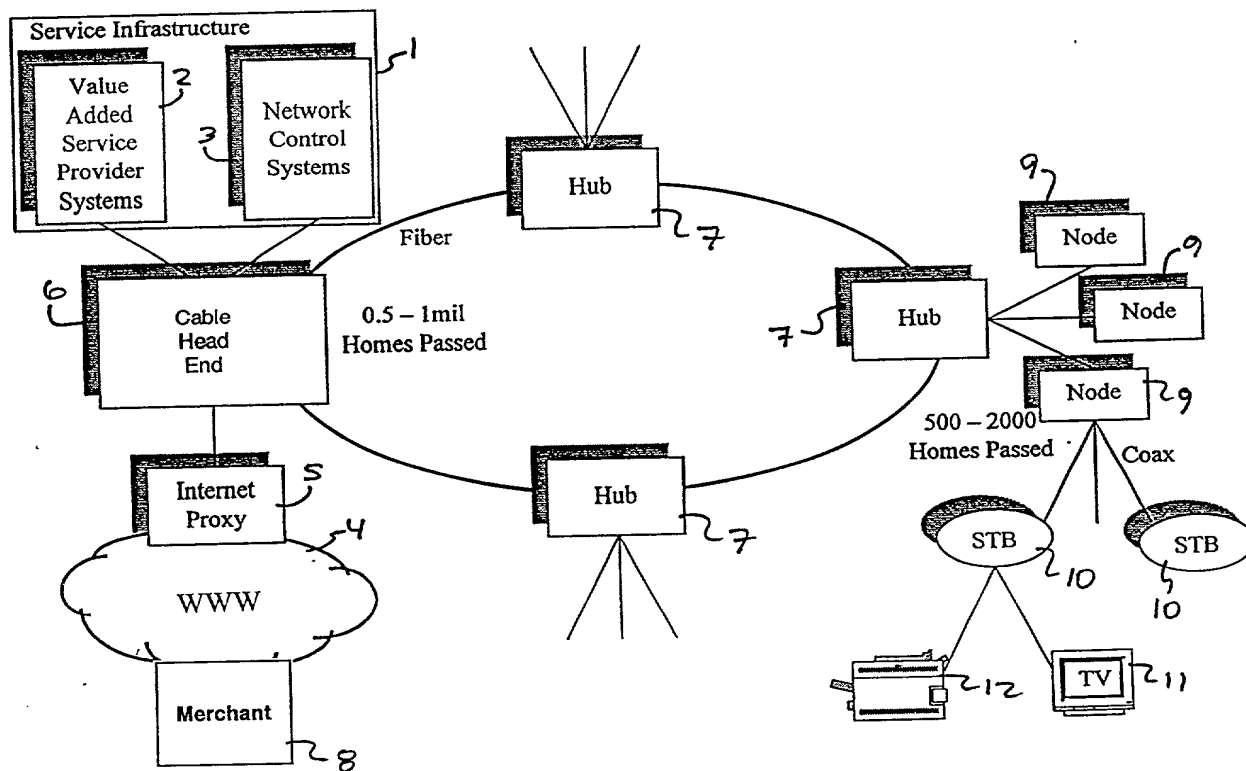


FIG. 1

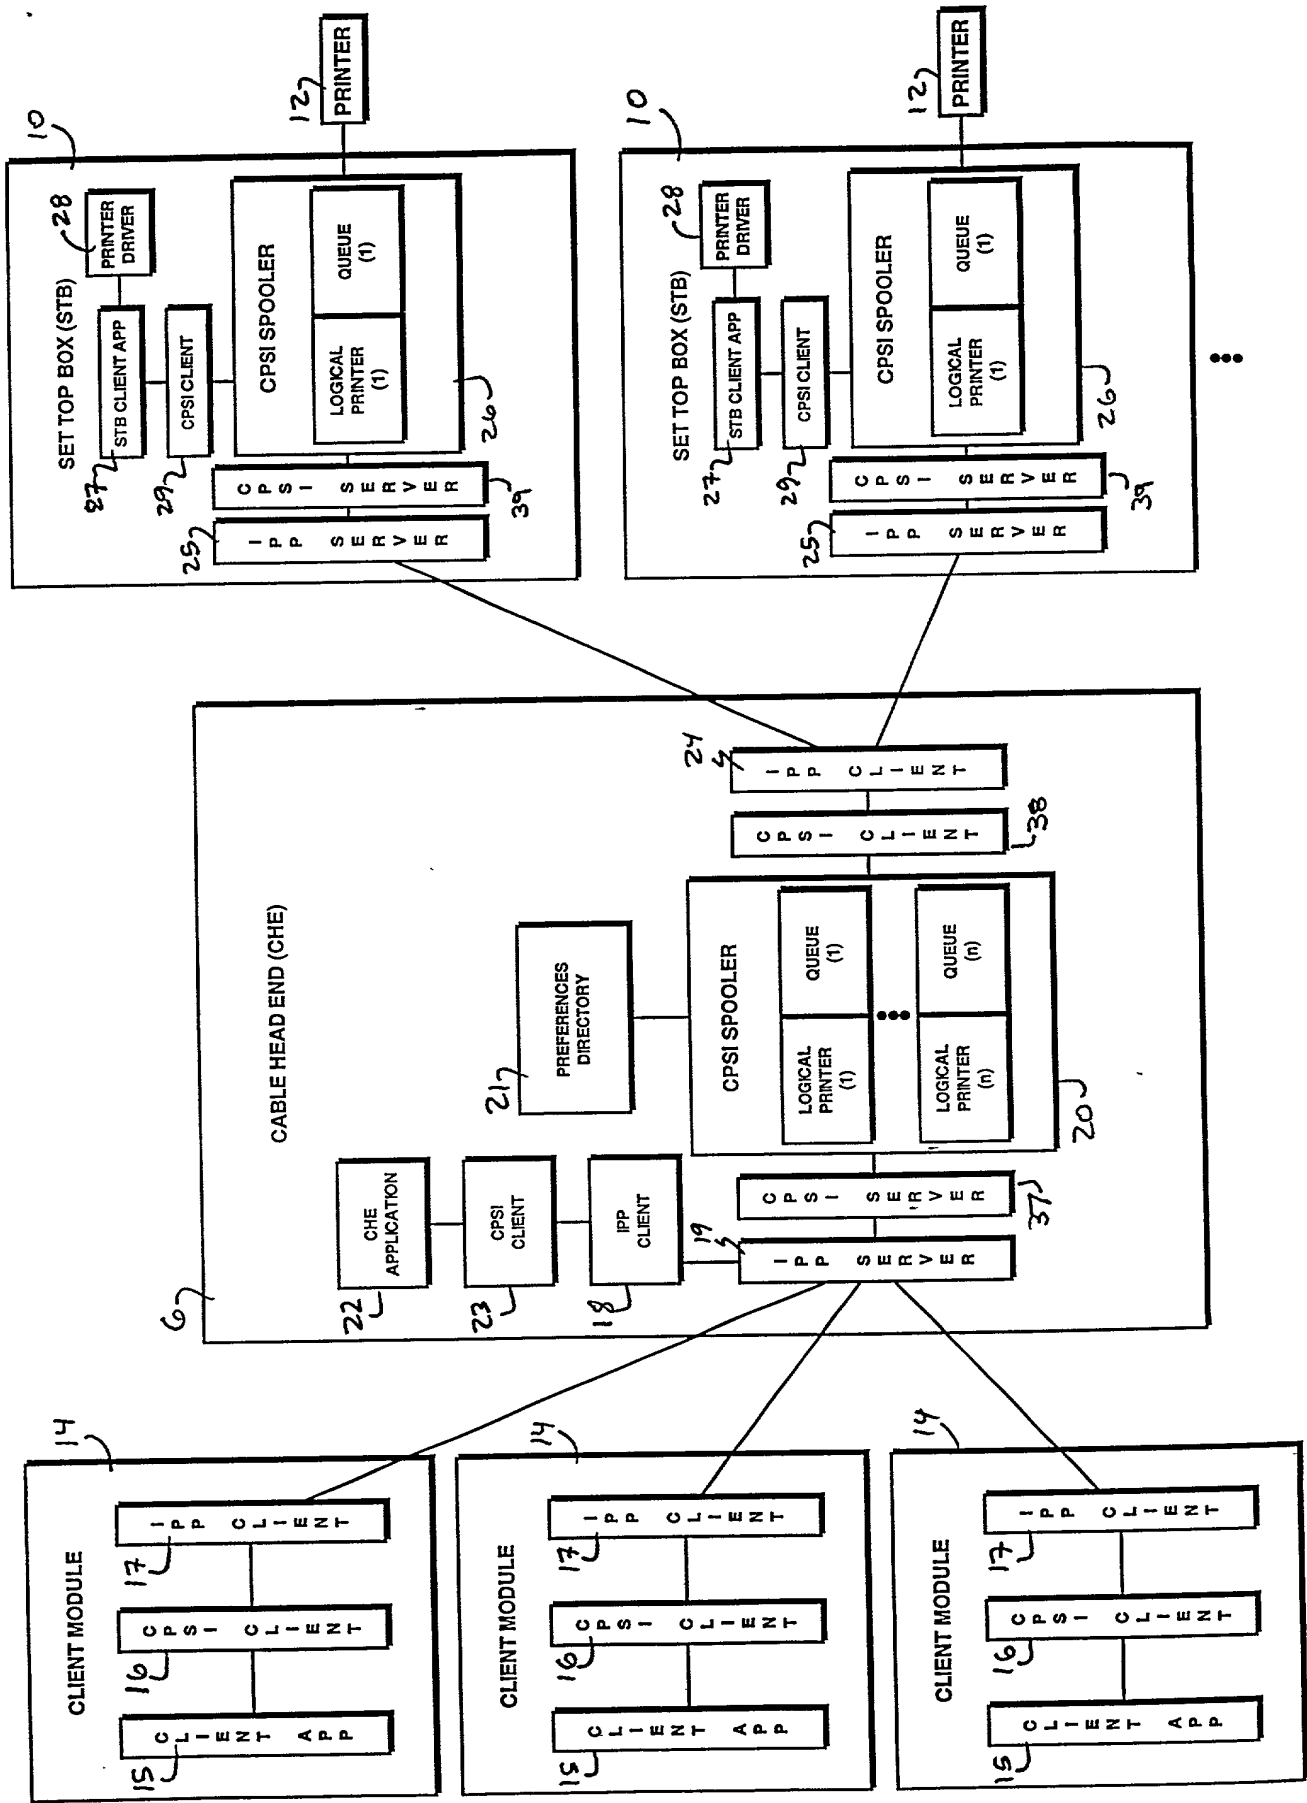


FIG. 2

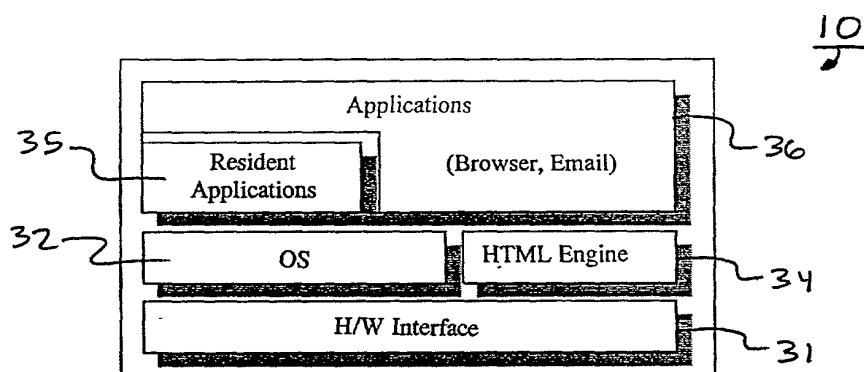


FIG. 3

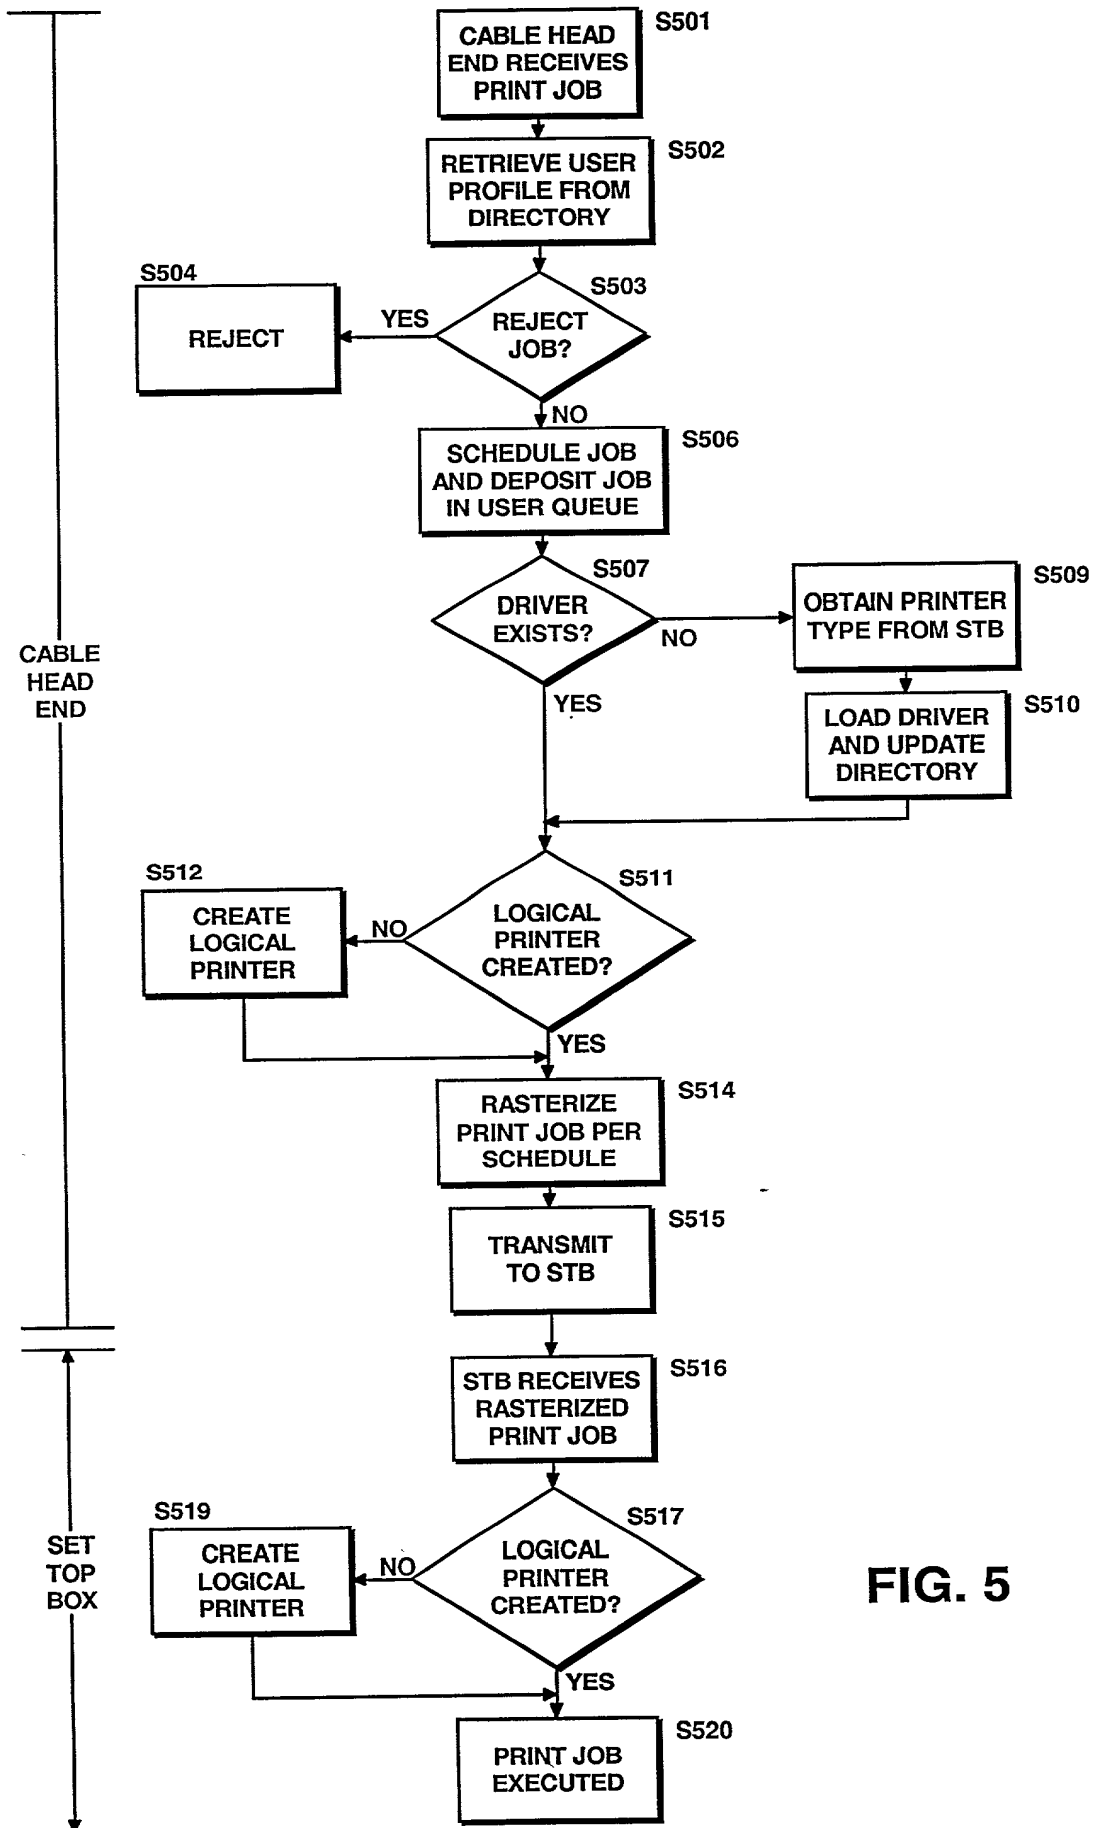


FIG. 5

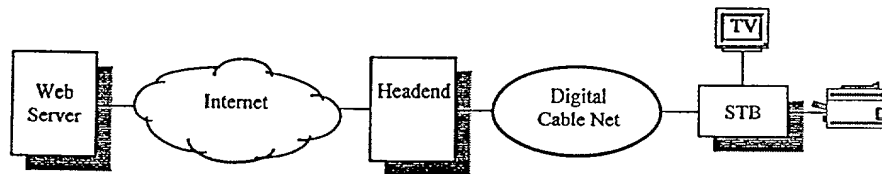


FIG. 6A

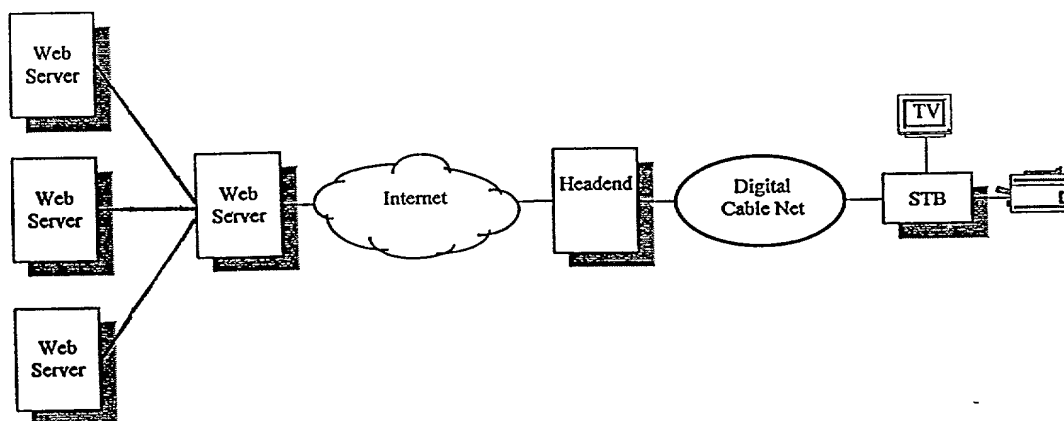


FIG. 6B

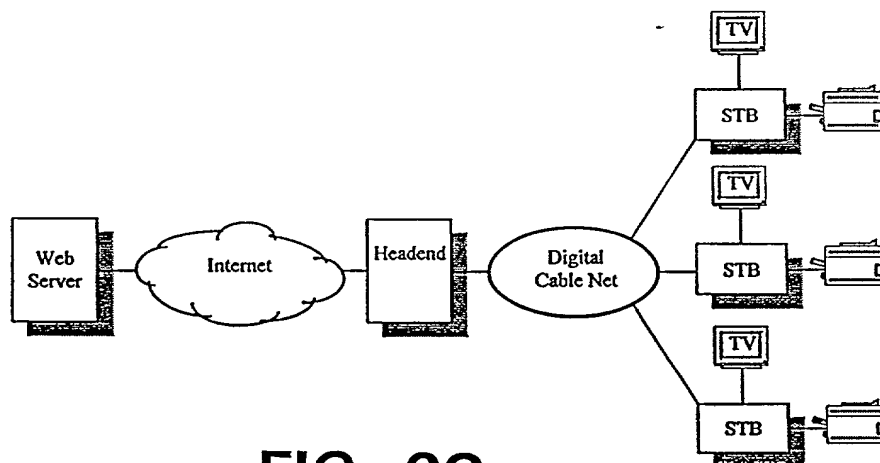


FIG. 6C

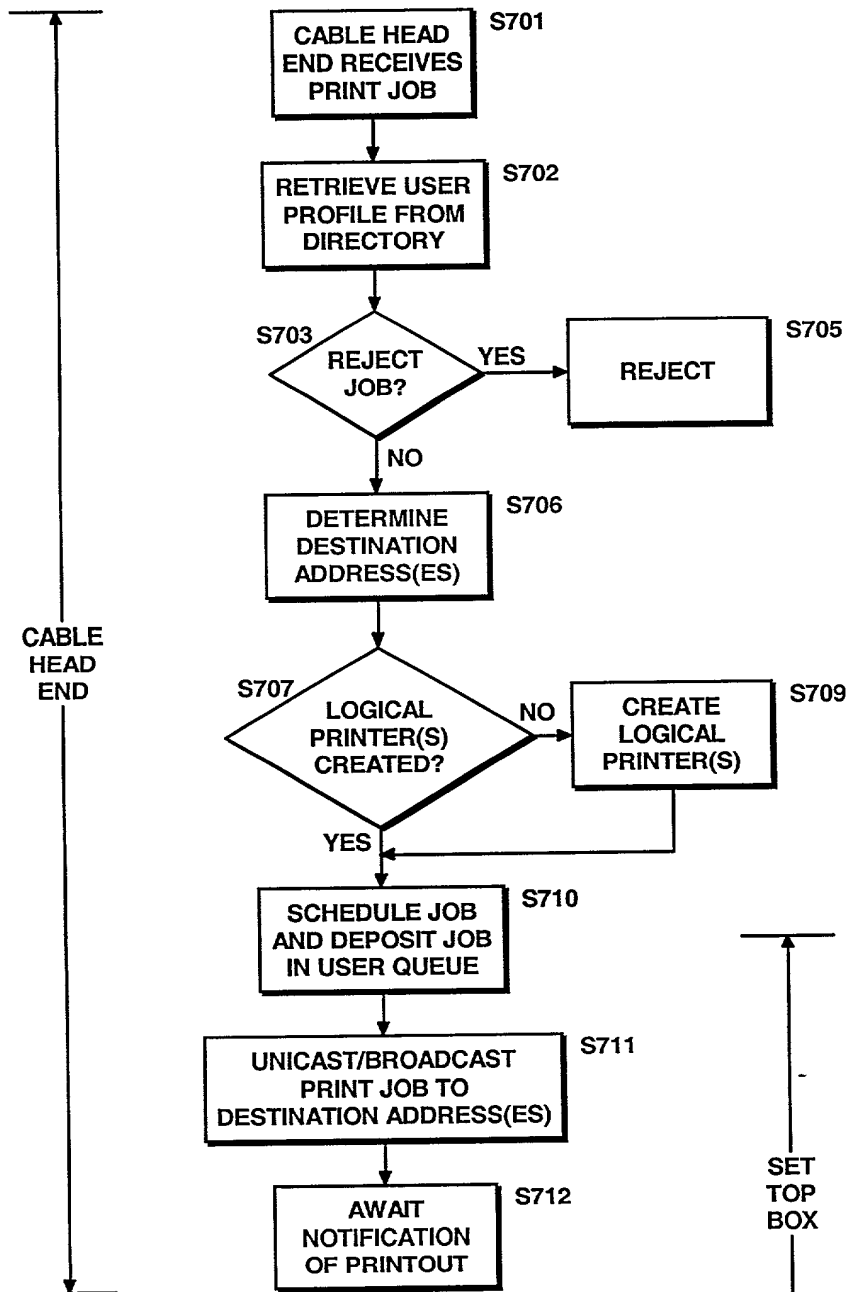


FIG. 7A

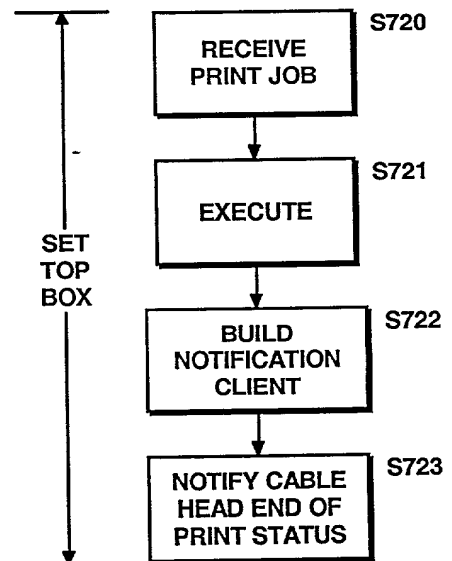


FIG. 7B

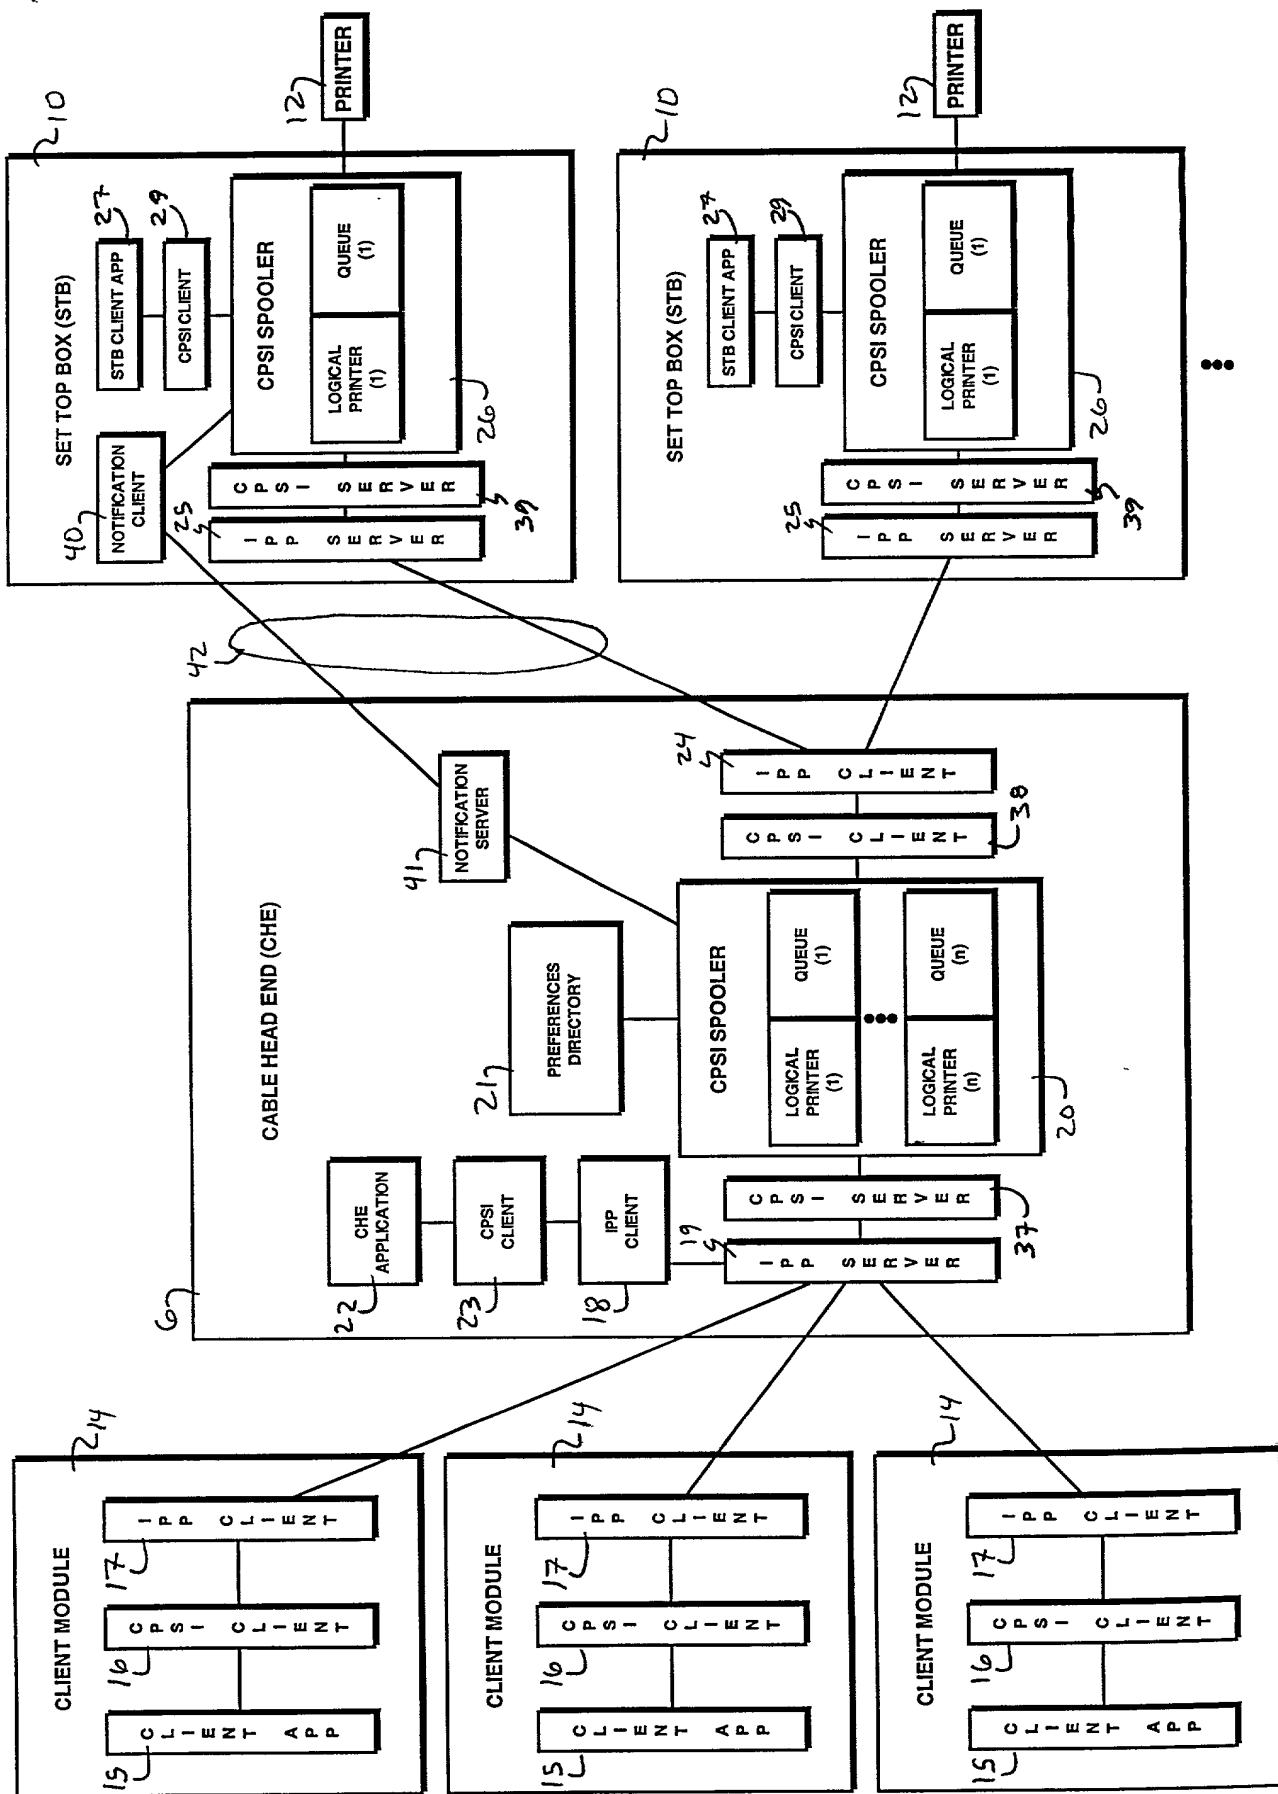


FIG. 8

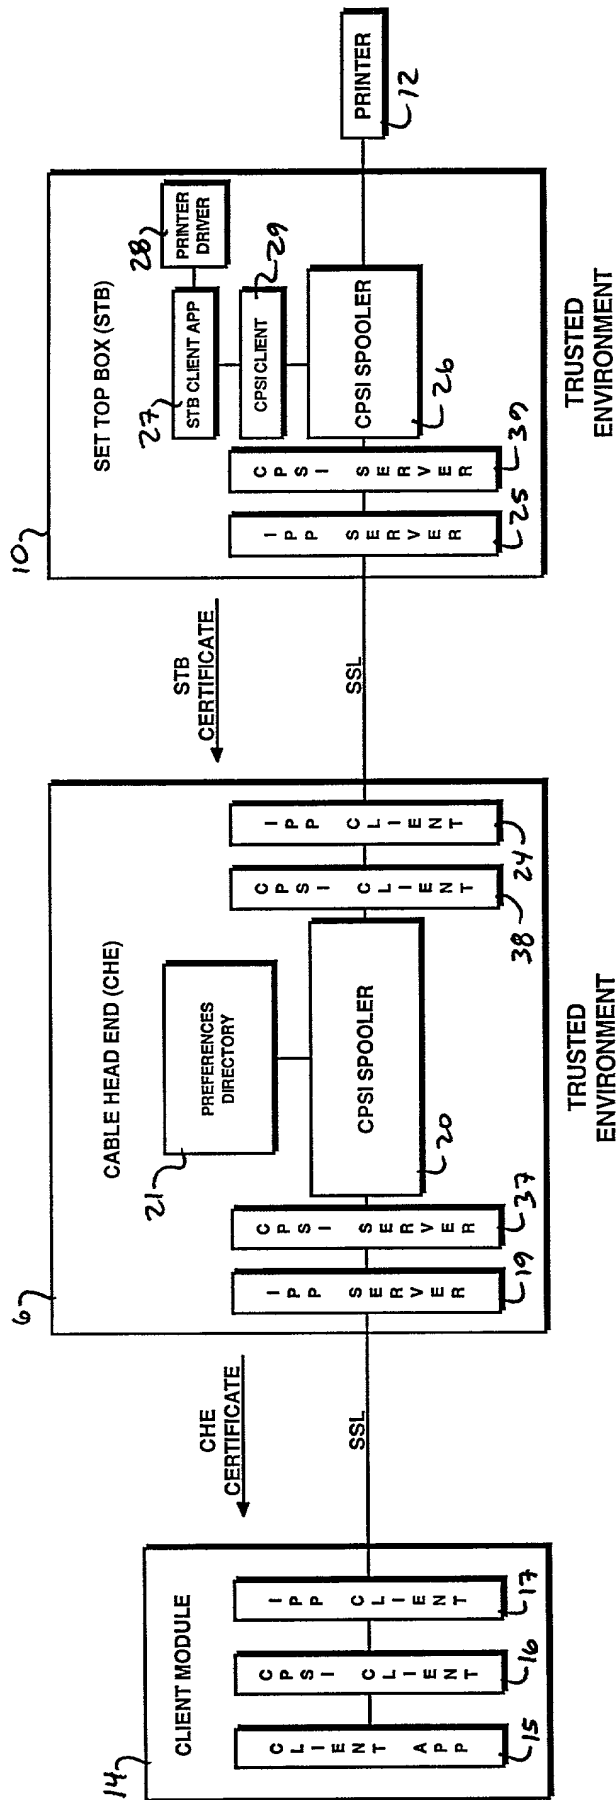


FIG. 9

FIG. 10 is a block diagram of a system architecture showing a Client Module (14) connected to a Cable Head End (CHE) (6) and a Set Top Box (STB) (10). The Client Module (14) contains a Client App (15), a CPSI Client (16), and an IPP Client (17). The Cable Head End (CHE) (6) contains an IPP Server (19), a CPSI Server (37), a Preferences Directory (21), and a CPSI Spooler (20). The Set Top Box (STB) (10) contains an IPP Server (25), a CPSI Server (39), a CPSI Client (29), an STB Client App (27), a Printer Driver (28), and a Printer (12). The Client Module (14) and the Cable Head End (CHE) (6) are in a Non-Trusted Environment, while the Set Top Box (STB) (10) is in a Trusted Environment. Data is transferred between the Client Module (14) and the Cable Head End (CHE) (6) via Rasterized/Encrypted data. Data is transferred between the Cable Head End (CHE) (6) and the Set Top Box (STB) (10) via Rasterized/Encrypted data.

PROTOCOL LAYERS

CPSI	1001
IPP	1002
HTTP	1003
SSL	1004
TCP/IP, OTHERS	1005

FIG. 10

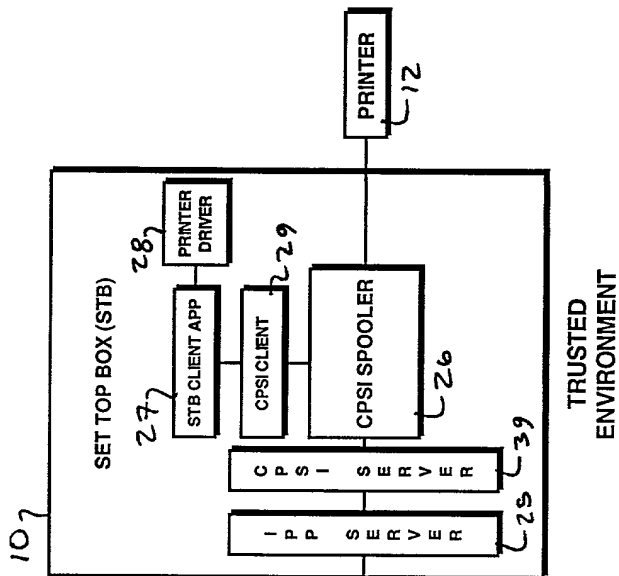


FIG. 11

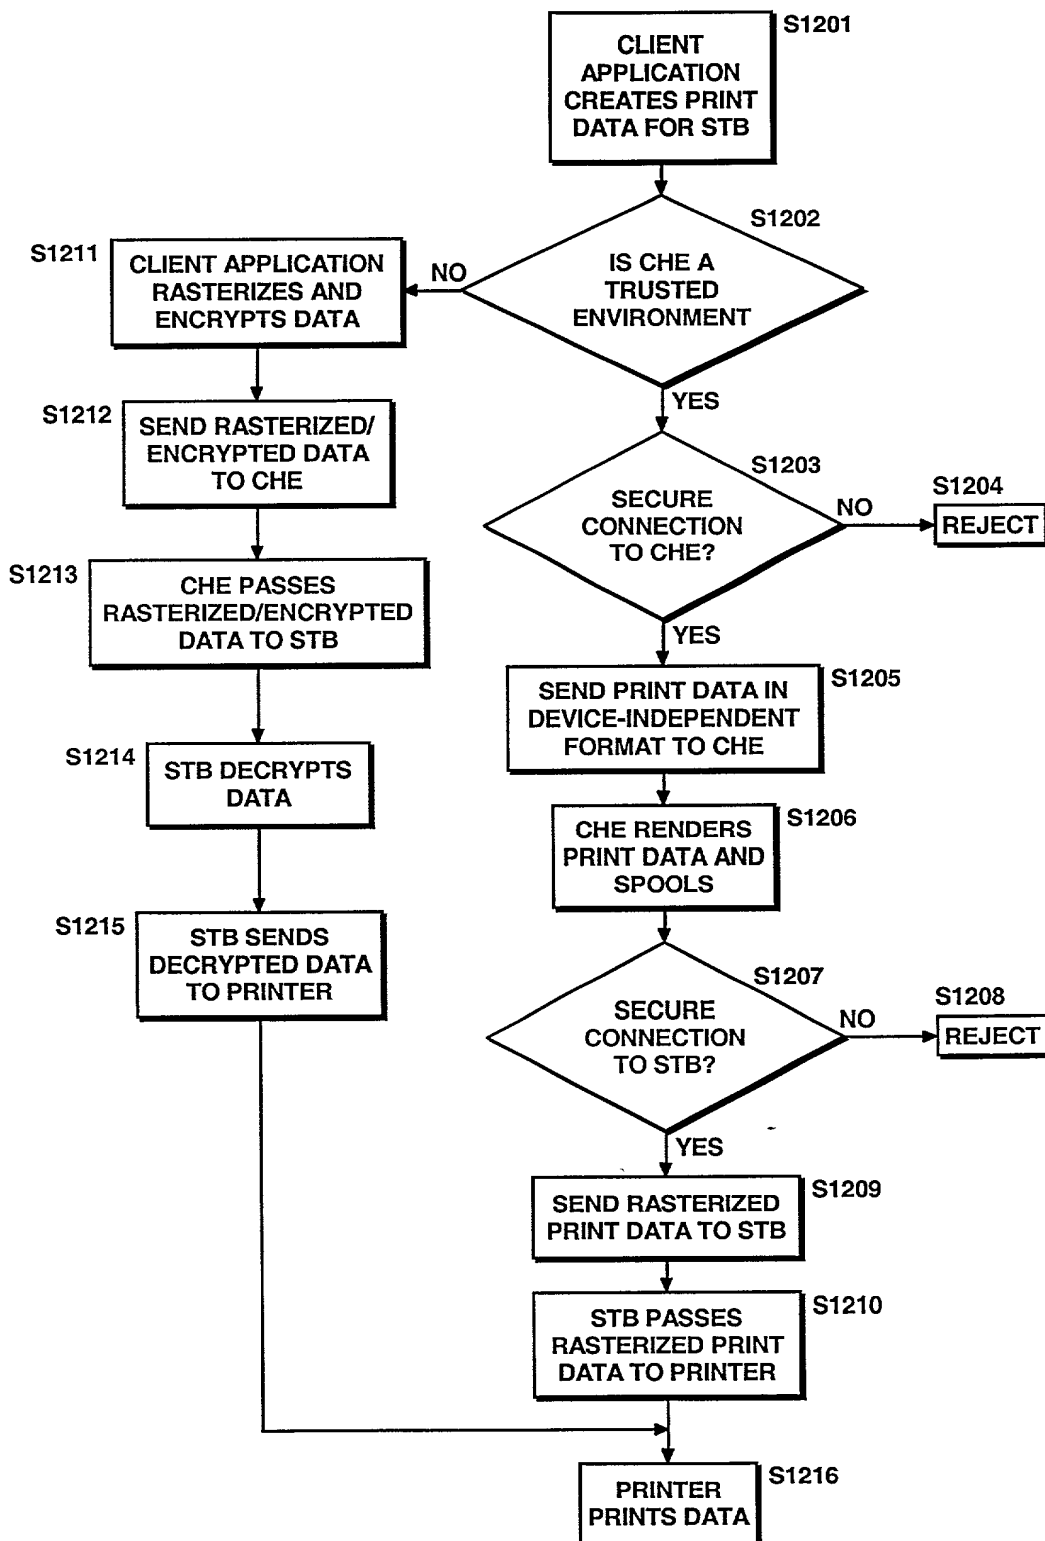


FIG. 12

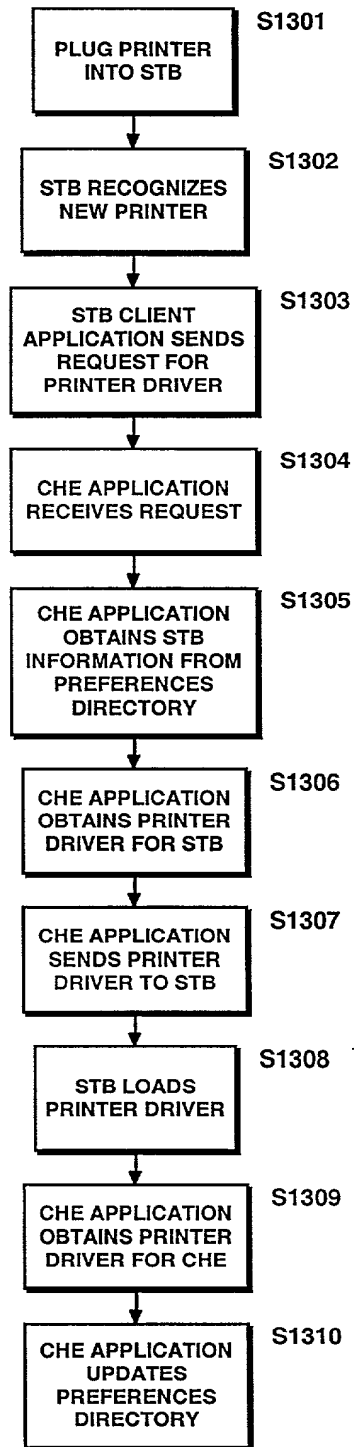


FIG. 13